



## Symmetry™ MultiNODE M2150 Intelligent Controller

### Datasheet

#### KEY FEATURES

- Modular mix and match configuration
- Connects to Symmetry management software via LAN, WAN, RS232 or modem
- Each M2150 can control up to 16 doors and readers
- Manages 20,000 card holders and 65,000 offline transactions (expandable to 250,000 cardholders)
- Connect smart card, proximity or legacy magstripe readers using MultiNODE Current Loop Protocol (MCLP) or OSDP (OSDP panels only)
- Wiegand and Biometric reader support using optional WIM
- OSDP-WIU for converting OSDP readers to work with Wiegand panels
- Elevator model controls up to 64 doors
- Wireless or secure AES encrypted communication options
- Available with or without enclosure and power supply
- UL Listings: UL 294, UL 1076

The multiNODE M2150 range of controllers provides distributed intelligence for your access control system and ensures complete system security, resilience and reliability. When integrated with Symmetry security management software, the M2150 controller range delivers a seamless security management system to protect all types of buildings while maintaining a low cost of ownership.

At the core of a standard access control installation is the M2150 Database Controller (DBC), an intelligent controller with built in database and support for 2, 4 or 8 card readers. Expansion of the system is simple using remote door Controllers (DC) that offer the functionality of the DBC without a Database onboard, up to a maximum of 16 doors.

Expansion beyond 16 doors is achieved by installing additional DBCs and DCs as required, providing solutions that can scale up to many thousands of doors. Each DBC can manage 20,000 cardholders, and this can be increased to a maximum of 250,000 using plug-in memory modules.

The M2150 DBU offers the ultimate in flexibility and system design architecture by delivering database intelligence with connectivity to remote door controllers.

The M2150 range of controllers provides a resilient and fault tolerant access control solution that will continue to operate in the unlikely event of database server or network infrastructure failure.

Using additional input or output modules and controllers the M2150 range can be extended to manage a number of applications, including alarm monitoring.



## M2150 Database Unit with Integrated Door Controller (DBC )

Each M2150 controller supports 20,000 cardholders (expandable to 250,000) and up to 16 card readers with the addition of optional door controllers. Includes integrated RS232 port. Door input and output controllers connect using RS485. Optional network interface modules are able to provide LAN or wireless access. Enclosure is supplied with 3.5A 12VDC power supply (20VAC or 24VDC input). Homeland Security Edition (HSE) and Hand Geometry variants are available - see price list for details.

Reference	Model	Doors	Enclosure	Size
G4T-M2150-043	2DBC	2	CAB3A	W: 16.5 in (420 mm), H: 21.7 in (550 mm), D: 3.7 in (95 mm)
M2150-2DBC	2DBC	2	Board only	W: 8.67 in (220 mm), H: 9.18 in (233 mm)
G4T-M2150-041	4DBC	4	CAB3A	W: 16.5 in (420 mm), H: 21.7 in (550 mm), D: 3.7 in (95 mm)
M2150-4DBC	4DBC	4	Board only	W: 11.03 in (280 mm), H: 10.24 in (260 mm)
G4T-M2150-001	8DBC	8	CAB3A*	W: 16.5 in (420 mm), H: 21.7 in (550 mm), D: 3.7 in (95 mm)
G4T-M2150-015	8DBC	8	CAB5*	W: 20.8 in (529 mm), H: 26.2 in (666 mm), D: 4.1 in (105 mm)
G4T-M2150-040	8DBC	8	RAK3	19" 2U Rack Mount Enclosure. 3.5A power supply
M2150-8DBC	8DBC	8	Board only	W: 11.03 in (280 mm), H: 10.24 in (260 mm)
M2150-8DBC-OSDP	8DBC-OSDP	8	Board only	W: 11.03 in (280 mm), H: 10.24 in (260 mm)


## M2150 Database Unit (DBU)

M2150 database unit supports 20,000 cardholders (expandable to 250,000) and up to 16 card readers with separate door controllers. Includes integrated RS232 port. Door input and output controllers connect using RS485. Optional network interface modules are able to provide LAN or wireless access. An integrated RS232 port is provided. Board only, requires enclosure and power supply.

*NOTE :The EN-DBU is also available - See separate datasheet*

Reference	Model	Doors	Enclosure	Size
M2150-DBU	DBU	-	Board only	W: 9.4 5in (240 mm), H: 6.3 in (160 mm)

\* 6A power supply (18VAC or 24VDC input)

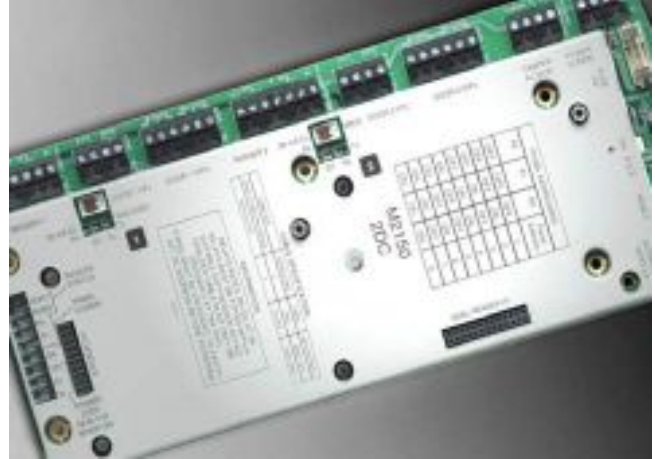

## M2150 Door Controller (DC)

Extends DBU and DBC to support up to 16 readers. Connects to DBU, 2DBC, 4DBC and 8DBC via RS485. Enclosure is supplied with 3.5A 12VDC power supply (20VAC or 24VDC input)

Reference	Model	Doors	Enclosure	Size
G4T-M2150-023	2DC	2	CAB3A	W: 16.5 in (420 mm), H: 21.7 in (550 mm), D: 3.7 in (95 mm)
M2150-2DC	2DC	2	Board only	W: 4.65 in (118 mm), H: 11.03 in (280 mm)
G4T-M2150-025	4DC	4	CAB3A	W: 16.5 in (420 mm), H: 21.7 in (550 mm), D: 3.7 in (95 mm)
M2150-4DC	4DC	4	Board only	W: 6.89 in (175 mm), H: 12.6 in (320 mm)
G4T-M2150-002	8DC	8	CAB3A*	W: 16.5 in (420 mm), H: 21.7 in (550 mm), D: 3.7 in (95 mm)
M2150-8DC	8DC	8	Board only	W: 11.03 in (280 mm), H: 10.24 in (260 mm)
M2150-8DC-OSDP	8DC-OSDP	8	Board only	W: 11.03 in (280 mm), H: 10.24 in (260 mm)

\* 6A power supply (18VAC or 24VDC input)



## Network Interface Modules

Plug-in module that connects to the DBU, 2DBC, 4DBC and 8DBC to provide an IP network interface connection.

Reference	Description
MN-NIC-5	Provides a 10/100 Mbps network connection for M2150 DBU, 2DBC, 4DBC, 8DBC and 8DBC-OSDP.
MN-NIC-4-ENC*	Provides a 10/100Mbps network connection for M2150 DBU, 2DBC, 4DBC, 8DBC and 8DBC-OSDP. Recommended for improved security, it replaces both MN-NIC-4 and MN-NIC-4-ENC. Note: TLS 1.2 and encryption capable, may require an export license for supply outside of the USA which may delay shipment.
MN-NIC-WI	Provides an 802.11b wireless network connection for DBU, 2DBC, 4DBC, 8DBC and 8DBC-OSDP.

## OSDP-WIU OSDP Interface Module

Each OSDP-WIU allows the connection of an OSDP reader to an M2150 Wiegand reader port.

Reference	Inputs	Outputs	Size
OSDP-WIU	1 OSDP	1 Wiegand	Without connectors W: 2.75 in (70 mm), H: 1.57 in (40 mm) With connectors fitted W: 3.54" in (90 mm), H: 1.57in (40 mm)

## Database Unit with Integrated Elevator Interface

Each M2150 elevator controller supports 20,000 cardholders (expandable to 250,000) and up to 64 floors, includes enclosure and power supply.

Reference	Elevators/Floors	Size
M2150-ELEV	1 elevator 32 floors 2 elevators 16 floors	W: 20 in (510 mm), H: 20 in (510 mm), D: 6.8 in (172 mm)
M2150-ELEV-EXT-S	1 elevator 64 floors 2 elevators 32 floors 4 elevators 16 floors	W: 20 in (510 mm), H: 20 in (510 mm), D: 6.8 in (172 mm) Extends to M2150-ELEV to support up to 64 floors or 4 elevators. (Add on extension for the M2150-ELEV, which must be ordered separately.)

## Input and Output Modules

Plug-in input and output modules mount onto the DBC and DC to provide additional inputs and outputs. The 2DBC, 2DC, 8DBC-OSDP and 8DC-OSDP support one module. The 4DBC and 4DC support two modules.

Reference	Inputs	Outputs	Size
M2150-AC8/4	8	4	W: 4.53 in (115 mm), H: 3.23in (82 mm)
M2150-OC4/8	4	8	W: 4.53 in (115 mm), H: 3.23 in (82 mm)

\*Requires export control licensing when exported to certain countries





## Input and Output Modules

Input and output controllers connect to the DBU, 2DBC, 4DBC, 8DBC and 8DBC-OSDP via RS485 to provide additional I/O. Each input or output controller added to an M2150 reduces the maximum number of readers that the controller can support by four.

Reference	Inputs	Outputs	Enclosures	Size
M2150-AC24/4	24	4	Board only	W: 6.89 in (175 mm), H: 12.6 in (320mm)
M2150-OC4/24	4	24	Board only	W: 6.89 in (175 mm), H: 12.6 in (320 mm)
G4T-M2150-003	24	4	CAB3A	W: 16.5 in (420 mm), H: 21.7 in (550 mm), D: 3.7 in (95 mm)
G4T-M2150-021	4	24	CAB3A	W: 16.5 in (420 mm), H: 21.7 in (550 mm), D: 3.7 in (95 mm)



## ENCLOSURES


- MN-CAB3A +PSU-KIT** Hinged lid enclosure with lock and 3.5A 12VDC power supply (20VAC or 24VDC input). W: 16.5 in (420 mm) H: 21.7 in (550 mm), D: 3.7 in (95 mm).  
Available space for:
- DBU with any one of the following: AC24/4, OC4/24, 4DC or 2DC
  - Any two of the following: 2DC, 4DC, AC24/4, OC4/24
  - One 8DBC, 8DC, 8DBC-OSDP, 8DC-OSDP, and 4DBC or 2DBC
- 
- MN-CAB4A +PSU-KIT** Hinged lid enclosure with lock and 3.5A 12VDC power supply (20VAC or 24VDC input). W: 19.7 in (500 mm), H: 22 in (560 mm), D: 4.1 in (105 mm)  
Available space for:
- DBU with any two of the following: AC24/4, OC4/24, 4DC, 2DC
  - One 8DBC, 8DC, 8DBC-OSDP, 8DC-OSDP, 4DBC or 2DBC plus any one of the following: AC24/4, OC4/24, 4DC
  - One 4DC, AC24/4 or OC4/24 optionally with up to two 2DC's
- 
- MN-CAB5 +PSU-KIT** Hinged lid enclosure with lock and 6A 12VDC power supply (20VAC or 24VDC input). W: 20.8 in (529 mm), H: 26.2 in (666 mm), D: 4.1 in (105 mm)  
Available space for:
- One, or any two of the following: 8DBC or 8DC



**MN-RAK3**

19" 2U rack mount enclosure and 3.5A 12VDC power supply (100 to 240VAC input). Available space for:

- DBU with any one of the following: AC24/4, OC4/24, 4DC or 2DC
- Any two of the following: 2DC, 4DC, AC24/4 or OC4/24
- One 8DBC, 8DC, 8DBC-OSDP, 8DC-OSDP, 4DBC or 2DBC

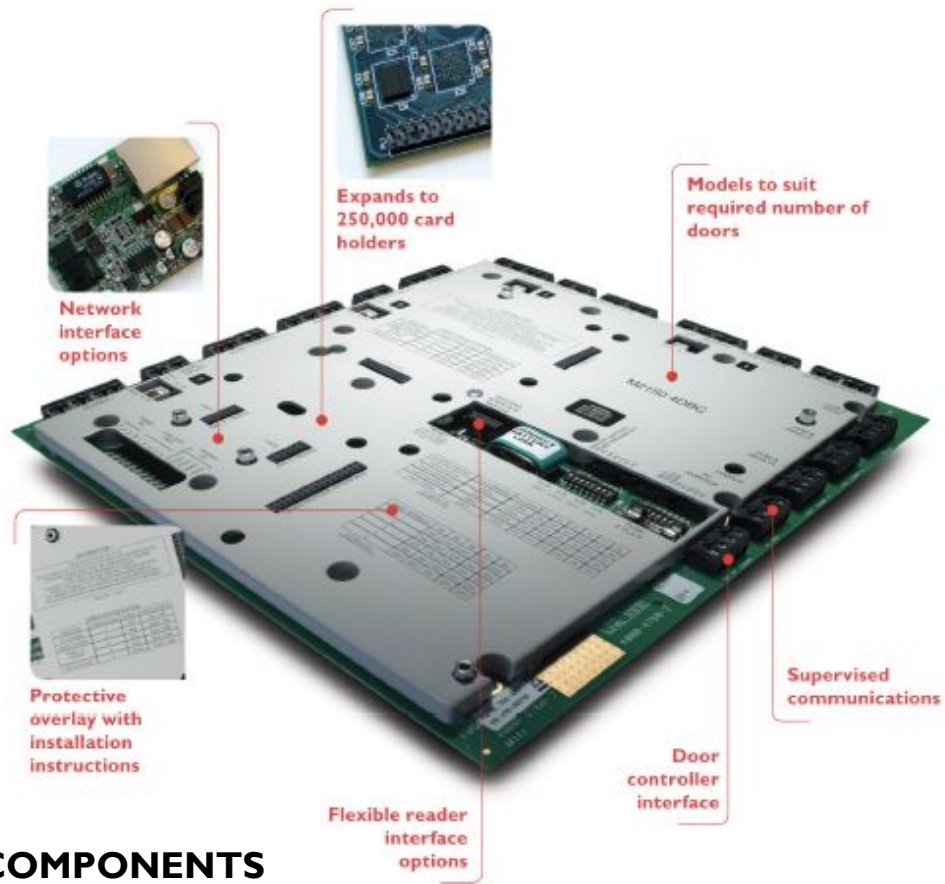

**OPTIONAL COMPONENTS**

MN-RS232-I	RS232 interface module. Provides a second RS232 interface for the DBU, 2DBC, 4DBC, 8DBC or 8DBC-OSDP
M2150-MEM-050K	50,000 cardholder memory module for DBU, 2DBC, 4DBC, 8DBC or 8DBC-OSDP
M2150-MEM-100K	100,000 cardholder memory module for DBU, 2DBC, 4DBC, 8DBC or 8DBC-OSDP
M2150-MEM-250K	250,000 cardholder memory module for DBU, 2DBC, 4DBC, 8DBC or 8DBC-OSDP
WIM2	Wiegand interface module for 2DBC or 2DC. Enables connection of 2 Wiegand readers
WIM4	Wiegand interface module for 4DBC or 4DC. Enables connection of 4 Wiegand readers
WIM8	Wiegand interface module for 8DBC, 8DBC-OSDP, 8DC or 8DC-OSDP. Enables connection of 8 Wiegand readers
MN-RS485-DUAL	RS485 reader interface module for 2DBC or 2DC. Enables connection of 2 RS485 readers (contact technical support for compatible readers)
MN-RS485-QUAD	RS485 reader interface module for 4DBC or 4DC. Enables connection of 4 RS485 readers (contact technical support for compatible readers)



## SPECIFICATIONS

### Management Software

- Symmetry Professional, Enterprise or Global version 6.1 SP2 or later

### Operating Environment

- +14°F to 131°F (-10°C to 55°C)
- 15% to 90% humidity, non-condensing

## Communications

### IP Network

- M2150 DBU and DBC LAN interface (10/100 Mbps)

### Hardwired/Modem

- DBU-OSDP or DBC-OSDP to PC or modem (RS-232) = 45 ft (15 m). RS232 port included as standard
- DBU-OSDP or DBC-OSDP to DBU or DBC (20mA) = 3,000 ft (1,000 m). Up to 32 controllers per chain
- DBU-OSDP or DBC-OSDP to DC (RS485) = 3,000 ft (1,000 m). Up to 16 readers per controller
- DBC-OSDP or DC to Symmetry reader (20mA) = 3,000 ft (1,000 m)
- DBC-OSDP or DC to Wiegand reader (requires Wiegand interface module) = 325 ft (100 m)

## Storage Capacities

- 20,000 cardholders and 65,000 offline transactions
- Optional memory modules increase capacity to 50,000, 100,000 or 250,000 cardholders

## Inputs/Outputs

- M2150 controllers support multiNODE 20mA Current Loop Protocol (MCLP) readers
- M2150-OSDP controllers support OSDP and Wiegand readers (MCLP not supported)
- Wiegand reader support via optional (WIM) interface module
- Door monitor and Exit request inputs support 2, 3 or 4 state supervision
- Relay outputs are rated at 30VDC, 3A max
- All input modules and alarms controllers support 2, 3, 4 or 6 state input supervision
- Each AC24/4 or OC4/24 controller added to an M2150 DBU or DBC reduces the maximum number of readers that the controller can support by four

**Note:** For single door applications supporting Power over Ethernet, please see the separate EN-IDBC datasheet.

Please refer to price list for part numbers for each referenced item.