

## D A T A S H E E T

# Javelin S870-EX-KP

## Proximity Card Reader



### Key Features

Proximity access control card reader for a wide range of security applications

Designed to fit most standard electrical back boxes

Maximum read range of 4" (102mm) dependent on card

Reads 125KHz HID proximity cards

Secure, bi-directional, pseudo-random supervised MCLP communications

Wiegand output

Integrated door pre-held warning buzzer

Multi-tone audio sounder for access granted, denied and PIN prompt

LED feedback for verification of card accepted or rejected

Three color LED alert status indication

Operating Environment of -15°F to +158°F (-25°C to +70°C)

### Product Overview

The Javelin S870-EX-KP is a proximity card reader with keypad designed for extreme weather conditions and environments for integrated access control. The attractive, contemporary black and silver finish is designed to complement any office or building environment.

The Javelin S870-EX-KP reads 125KHz HID proximity cards.

The Javelin S870-EX-KP is designed for use with the Symmetry range of door controllers and is compatible with all versions of Symmetry software.

The Javelin S870-EX-KP uses secure, bi-directional, pseudo-random supervised MCLP communications to the door controller. Both the card reader and cable are supervised, and an alarm will be generated if the card reader is tampered with, or communications lost.

Wiegand communication is also supported between the card reader and controller.

### Extreme Environment

The membrane keypad has been designed to allow the S870-EX-KP card reader to operate in extreme weather conditions, enabling full functionality in heavy rain, seawater, freezing and snowy conditions.

## Javelin S870-EX-KP Proximity Card Reader



### Specifications

#### Model Types

- Javelin S870-EX-KP - HID 125KHz keypad proximitycard reader

#### Dimensions Inches (mm)

- Width = 3.5" (85mm)
- Height = 4.4" (113mm)
- Depth = 0.9" (23mm)

#### Operating Environment

- -13°F to +158°F (-25°C to +70°C)
- 15% to 90% humidity, non-condensing

#### Communication Distances

- All Symmetry door controllers to Symmetry S870 (MCLP) = 3000 ft/1000m
- All Symmetry door controllers to Symmetry S870 (Wiegand) = 500 ft/150m

#### Power Requirements

- Nominal 12VDC (9-14V)
- Maximum current consumption 120mA

### Purchasing Information

870-EX-KP – keypad proximity card reader for extreme conditions

### Approvals

#### Radio Regulatory Approvals

- FCC CFR47 Part 15C
- EN 302291

#### EMC Type Testing

- EN301489

#### Access Control Product Testing

- IP44: R & TTE Directive 1999/5/E
- UL 294



1-800-889-9138




sales@amag.com




www.amag.com




**Javelin S870-EX-KP**  
**Proximity Card Reader**



3.5" (85 mm)

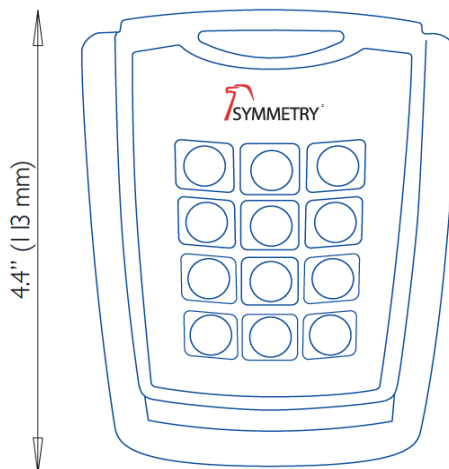

4.4" (113 mm)

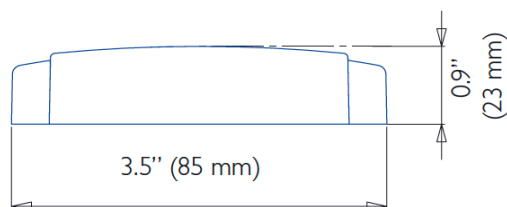

0.9" (23 mm)

3.5" (85 mm)



1-800-889-9138



sales@amag.com



www.amag.com

